

VENUS




Radiator painted in Standard White (cod. 01)

Bathroom radiator **VENUS**

VENUS is an interlacing of horizontal curved lines with a singular elegance. Thanks to its refined design, **VENUS** is ideal for any bathroom interior. Its linear and precise shape makes it easy to clean and an excellent towel warmer.

The **VENUS** "termoarredatore®" also comes in the 50 mm connection version.



Venus is available also in Chromium-plated finish.

Detail of the electric heater with electronic control (a wireless version is also available). Both electric heaters can be installed as an optional for mixed radiator function.




VENUS

L	P	R	M1	M2
497	45	1300	47÷62	62÷77
595	55	1300	42÷57	56÷71
740	74	1300	29÷44	44÷59

VENUS 50 mm



In photo: Venus radiator. Height mm 1720, width 595 mm, colour Standard White (cod. 01).

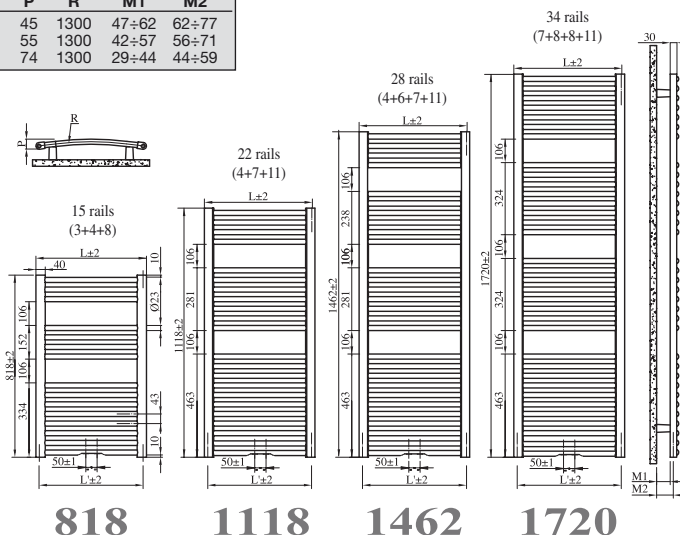

TECHNICAL SPECIFICATIONS: steel towel warmer radiator with horizontal elements featuring round tubes with a 23 mm diameter; side manifolds with a 40x30 mm semioval section; manifold threading 1/2" Gas right; maximum working pressure 8 bar; maximum working temperature 95°C.

MODEL	Code	Depth P mm	Height H mm	Length L mm	Conn. centre L' mm	Weight Kg	Capacity lit	Thermal power					Expon. n.	Dual power Watt
								Δt 50°C Btu/h	Δt 50°C Watt	Δt 40°C Watt	Δt 30°C Watt	Δt 20°C Watt		
818 H mm 818 15 RAILS 2 SPACES	M X S045 01	41	818	448	418	6,1	3,3	1147	336	257	181	111	1,207	300
	M X S050 01	45	818	497	467	6,6	3,6	1249	366	280	198	121	1,207	400
	M X S060 01	55	818	595	565	7,6	4,1	1452	426	325	230	141	1,206	400
	M X S075 01	74	818	740	710	9,1	4,8	1757	515	393	278	171	1,206	400
1118 H mm 1118 22 RAILS 2 SPACES	M X M045 01	41	1118	448	418	8,7	4,7	1639	480	361	251	150	1,274	400
	M X M050 01	45	1118	497	467	9,4	5,1	1795	526	397	276	165	1,265	400
	M X M060 01	55	1118	595	565	10,9	5,8	2105	617	467	326	197	1,246	700
	M X M075 01	74	1118	740	710	13,0	6,8	2570	753	574	404	247	1,219	700
1462 H mm 1462 28 RAILS 3 SPACES	M X L045 01	41	1462	448	418	11,2	6,1	2106	617	469	330	201	1,226	700
	M X L050 01	45	1462	497	467	12,1	6,5	2306	676	514	361	220	1,226	700
	M X L060 01	55	1462	595	565	13,9	7,4	2706	793	603	424	258	1,224	700
	M X L075 01	74	1462	740	710	16,6	8,8	3305	969	737	519	316	1,221	1000
1720 H mm 1720 34 RAILS 3 SPACES	M X G045 01	41	1720	448	418	13,4	7,3	2554	748	571	403	247	1,212	700
	M X G050 01	45	1720	497	467	14,5	7,8	2792	818	624	441	270	1,211	700
	M X G060 01	55	1720	595	565	16,7	8,9	3267	957	731	516	316	1,210	1000
	M X G075 01	74	1720	740	710	20,0	10,6	3979	1166	890	629	385	1,208	1000

01 = Standard White colour code - for different colour codes see the colour code.

X = I for connections at either end of the radiator; H for 50 mm connections

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Packaging include: 1 1/2" adjustable chrome plated air vent; 4 wall brackets.

CE⁰⁵
EN442-1

EN⁴⁴²
EURO NORM

IRSAP
i termoarredatori